


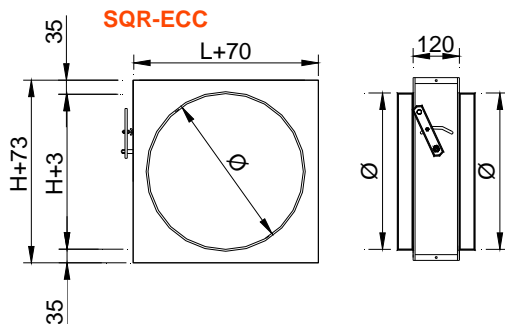
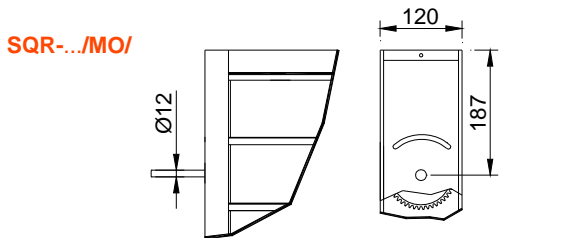


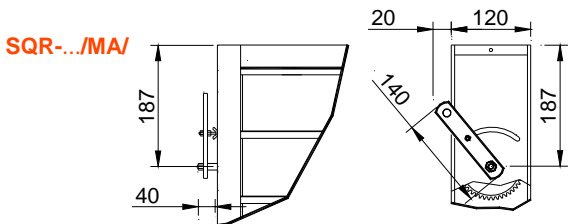

## SQR rectangular air volume control dampers

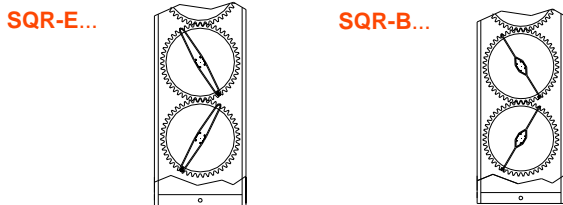

The **SQR** series damper are designed to be used for altering the flow volume rate and pressure in air-conditioning, ventilation and heating systems. Opposed blades of 100 mm.

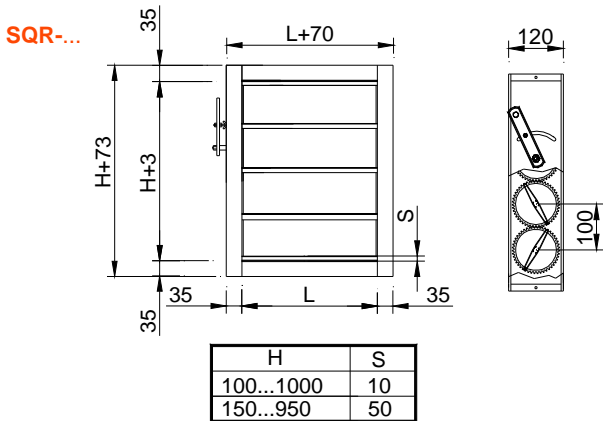

## CLASSIFICATION

**SQR-EH** Damper with rhomboidal profile blades, parallels to the largest side (L size).

**SQR-EV** Damper with rhomboidal profile blades, parallels to the shortest side (H size).

**SQR-BH** Damper with flat profile blades, parallels to the largest side (L size).

**SQR-BV** Damper with flat profile blades, parallels to the shortest side (H size).

**SQR-ECC** Square damper with rhomboidal profile blades and circular connections.

**SQR-BCC** Square damper with flat profile blades and circular connections.

**.../MA/** Damper with manual control lever.

**.../MO/** Damper with special axle to motorise.

## MATERIAL

“U” shaped extruded aluminium frame.  
 Extruded aluminium aerodynamic blades with a rubber seal around the edge.  
 Galvanised steel axle.  
 Galvanised steel protection sheet for the transmission system.  
 High resistance bearings.  
 Transmission by gears, placed in the external part of the dampers, to avoid dirt in the transmission.

**Siemens GDB/GLB Siemens GEB/GMA**



**Belimo LM/NM**



**Belimo LF/NF**



**ACCESSORIES - ACTUATORS**

**ON/OFF actuators**

- GDB141.1E** On/Off 24 VAC/VDC 5N Siemens actuator.
- GDB341.1E** On/Off 100... 230 VAC Siemens actuator.
- GLB141.1E** On/Off 24 VAC/VDC Siemens actuator.
- GLB341.1E** On/Off 100...230 VAC Siemens actuator.
- GEB131.1E** On/Off 24 VAC 15N Siemens actuator.
- GEB331.1E** On/Off 230 VAC 15N Siemens actuator.

- LM24A** On/Off 24 VAC/VDC 5N Belimo actuator.
- LM230A** On/Off 230 VAC 5N Belimo actuator.
- NM24A** On/Off 24 VAC/VDC 10N Belimo actuator.
- NM230A** On/Off 230 VAC 10N Belimo actuator.

**ON/OFF actuators with switches device**

- GDB146.1E** On/Off 24 VAC/VDV 5N 2FC Siemens actuator.
- GDB346.1E** On/Off 100...230 VAC 5N 2FC Siemens actuator.
- GLB146.1E** On/Off 24 VAC/VDC 10N 2FC Siemens actuator.
- GLB346.1E** On/Off 100...230 VAC 10N 2FC Siemens actuator.
- GEB136.1E** On/Off 24 VAC 15N 2FC Siemens actuator.
- GEB336.1E** On/Off 230 VAC 15N 2FC Siemens actuator.

- LM24A-S** On/Off 24 VAC/VDC 5N 1FC Belimo actuator (\*)
- LM230A-S** On/Off 5N 1FC Belimo actuator (\*)
- NM24A-S** On/Off 24 VAC/VDC 10N 1FC Belimo actuator (\*)
- NM230A-S** On/Off 10N (191,82 €) 1 FC Belimo actuator (\*)

\* *Belimo actuator with end of course switch for 2 contacts. Check availability.*

**ON/OFF actuators with spring return**

- GMA121.1E** On/Off 24 VAC/VDC 7N Siemens actuator.
- GMA321.1E** On/Off 230 VAC 7N Siemens actuator.
- LF-24** On/Off 24 VAC/VDC 4N Belimo actuator.
- LF-230** On/Off 230 VAC 4N Belimo actuator.
- NFA** On/Off 24-230 VAC On/Off 10N Belimo actuator.

**Proportional actuators**

- GDB161.1E** 24 VAC 5N Siemens actuator.
- GLB161.1E** 24 VAC 10N Siemens actuator.
- GEB161.1E** 24 VAC 15N Siemens actuator.
- LM24A-SR** 24 VAC/VDC 5N Belimo actuator.
- LM230A-SR** 230 VAC 5N Belimo actuator.
- NM24A-SR** 24 VAC/VDC 10N Belimo actuator.
- NM230A-SR** 230 VAC 10N Belimo actuator.


**Communicating actuators**

Consult actuator models with Modbus / KNX / LONWorks and Bacnet communications protocols.



### ACTUATORS POWER SELECTION

L x H mm	servo N	L x H mm	servo N	L x H mm	servo N
200x100	5 N	700x250	5 N	700x600	5 N
300x100	5 N	800x250	5 N	800x600	5 N
400x100	5 N	900x250	5 N	900x600	5 N
500x100	5 N	1000x250	5 N	1000x600	5 N
600x100	5 N	1200x250	5 N	1200x600	5 N
700x100	5 N	1400x250	5 N	1400x600	10 N
800x100	5 N	1600x250	5 N	1600x600	10 N
900x100	5 N	1800x250	5 N	1800x600	10 N
1000x100	5 N	2000x250	5 N	2000x600	10 N
1200x100	5 N	<b>300x300</b>	5 N	<b>700x700</b>	5 N
1400x100	5 N	400x300	5 N	800x700	5 N
1600x100	5 N	500x300	5 N	900x700	5 N
1800x100	5 N	600x300	5 N	1000x700	5 N
2000x100	5 N	700x300	5 N	1200x700	5 N
<b>200x150</b>	5 N	800x300	5 N	1400x700	10 N
300x150	5 N	900x300	5 N	1600x700	10 N
400x150	5 N	1000x300	5 N	1800x700	10 N
500x150	5 N	1200x300	5 N	2000x700	10 N
600x150	5 N	1400x300	5 N	<b>800x800</b>	5 N
700x150	5 N	1600x300	5 N	900x800	5 N
800x150	5 N	1800x300	5 N	1000x800	10 N
900x150	5 N	2000x300	5 N	1200x800	10 N
1000x150	5 N	<b>400x400</b>	5 N	1400x800	10 N
1200x150	5 N	500x400	5 N	1600x800	10 N
1400x150	5 N	600x400	5 N	1800x800	15 N
1600x150	5 N	700x400	5 N	2000x800	15 N
1800x150	5 N	800x400	5 N	<b>900x900</b>	10 N
2000x150	5 N	900x400	5 N	1000x900	10 N
<b>200x200</b>	5 N	1000x400	5 N	1200x900	10 N
300x200	5 N	1200x400	5 N	1400x900	10 N
400x200	5 N	1400x400	5 N	1600x900	15 N
500x200	5 N	1600x400	5 N	1800x900	15 N
600x200	5 N	1800x400	5 N	2000x900	15 N
700x200	5 N	2000x400	5 N	<b>1000x1000</b>	10 N
800x200	5 N	<b>500x500</b>	5 N	1200x1000	10 N
900x200	5 N	600x500	5 N	1400x1000	10 N
1000x200	5 N	700x500	5 N	1600x1000	15 N
1200x200	5 N	800x500	5 N	1800x1000	15 N
1400x200	5 N	900x500	5 N	2000x1000	15 N
1600x200	5 N	1000x500	5 N		
1800x200	5 N	1200x500	5 N	<b>CC</b>	servo
2000x200	5 N	1400x500	5 N	mm	N
<b>300x250</b>	5 N	1600x500	10 N	400	5 N
400x250	5 N	1800x500	10 N	<b>450</b>	5 N
500x250	5 N	2000x500	10 N	500	5 N
600x250	5 N	<b>600x600</b>	5 N	630	5 N

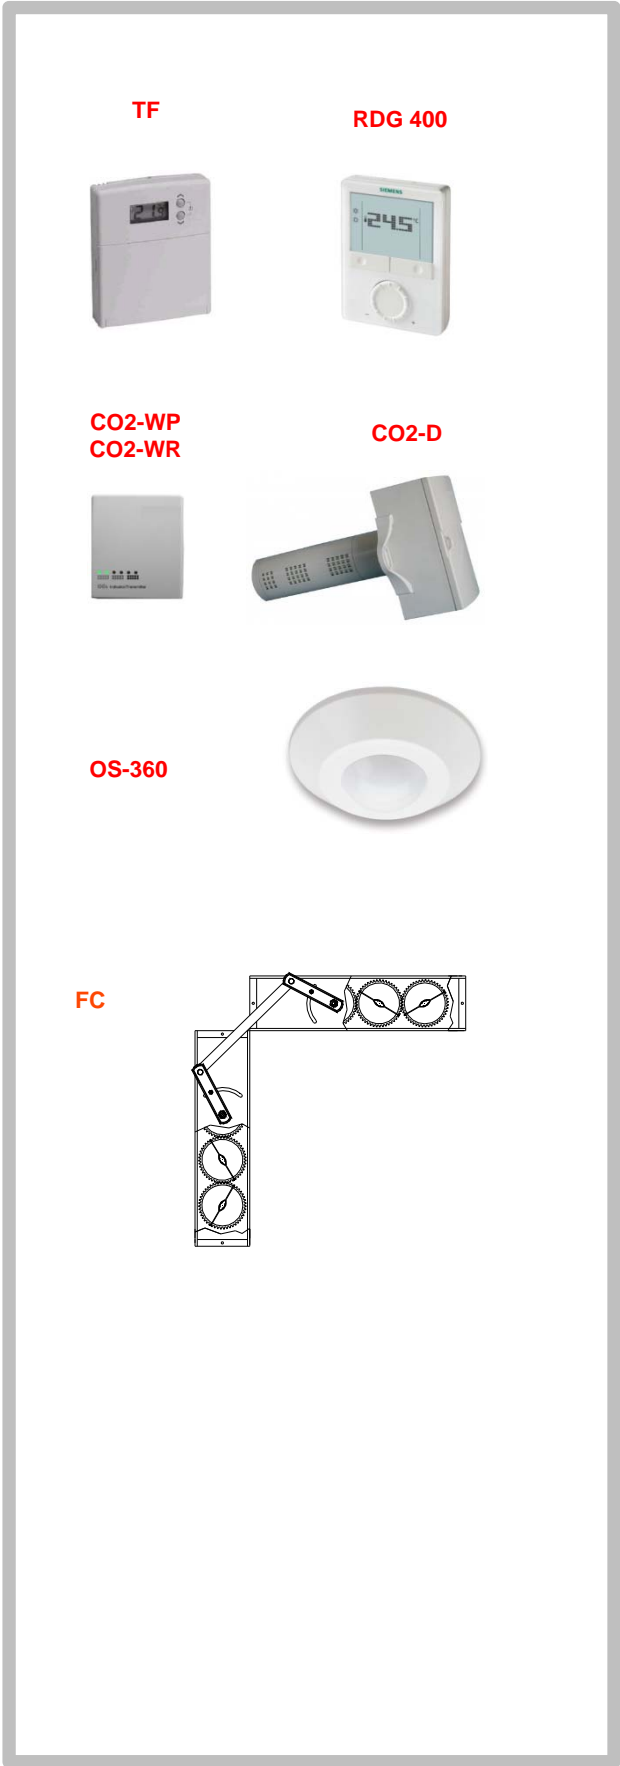

**TEMPERATURE CONTROL**

**TF** Thermostat with cables for temperature control using On/Off actuator. Manual seasonal change over.

**RDG 400** Siemens proportional temperature controller ambiance 0..10Vcc power supply 24vac with backlit digital display, selector comfort eco/off; for proportional damper actuators.

**CO2-WP** Proportional CO2 24vdc vac wall-mounting detector .With LED indicator. Analog output 0-10Vdc. Setpoint 600 - 800 -1000 ppm. Proportional actuator required.

**CO2-D** Proportional CO2 sensor for duct mounting 24vdc-vac with an output 0-10Vdc IP54. Proportional actuator required.

**CO2-WR** Wall-mounting detector with LED indicator. Digital output (relay 5A) Setpoint 800 - 1000 -1200 Detector with relay output (ON/OFF actuator required)

**OS-360** Ceiling mounting occupancy sensor, for automatic operation control of HVAC devices. 24 Vac/Vdc current drain relay signal output. Selectable ON /OFF delays.

**MOUNTING ACCESSORIES**

**/FC/** Free-cooling kit for assembling 2 dampers at 90°.

**FIXING SYSTEMS**

1) The frame of the damper has been designed in order to be jointed with rivets in ducts or other flat surface.

**CR** Flat connection flange .

**FINISHES**

Raw aluminium.


**SPECIFICATION TEXT**

Supply and mounting of airtight damper to control the air flow volume in rectangular ducts with manual control lever series **SQR-EH/MA/ LxH** constructed from raw aluminium and gears from polyamide. Manufacturer **MADEL**.

# SQR SERIES


BxH (m2) ( A face )

H \ B	100	200	300	400	500	600	700	800	900	1000	1100	1200
100	0,01	0,02	0,03	0,04	0,05	0,06	0,07	0,08	0,09	0,1	0,11	0,12
150	0,01	0,03	0,04	0,06	0,07	0,09	0,1	0,12	0,13	0,15	0,16	0,18
200	0,02	0,04	0,06	0,08	0,1	0,12	0,14	0,16	0,18	0,2	0,22	0,24
250	0,02	0,05	0,07	0,1	0,12	0,15	0,17	0,2	0,22	0,25	0,27	0,3
300	0,03	0,06	0,09	0,12	0,15	0,18	0,21	0,24	0,27	0,3	0,33	0,36
350	0,03	0,07	0,1	0,14	0,17	0,21	0,24	0,28	0,31	0,35	0,38	0,42
400	0,04	0,08	0,12	0,16	0,2	0,24	0,28	0,32	0,36	0,4	0,44	0,48
450	0,04	0,09	0,13	0,18	0,22	0,27	0,31	0,36	0,4	0,45	0,49	0,54
500	0,05	0,1	0,15	0,2	0,25	0,3	0,35	0,4	0,45	0,5	0,55	0,6
550	0,05	0,11	0,16	0,22	0,27	0,33	0,38	0,44	0,49	0,55	0,6	0,66
600	0,06	0,12	0,18	0,24	0,3	0,36	0,42	0,48	0,54	0,6	0,66	0,72
650	0,06	0,13	0,19	0,26	0,32	0,39	0,45	0,52	0,58	0,65	0,71	0,78
700	0,07	0,14	0,21	0,28	0,35	0,42	0,49	0,56	0,63	0,7	0,77	0,84
750	0,07	0,15	0,22	0,3	0,37	0,45	0,52	0,6	0,67	0,75	0,82	0,9
800	0,08	0,16	0,24	0,32	0,4	0,48	0,56	0,64	0,72	0,8	0,88	0,96
850	0,08	0,17	0,25	0,34	0,42	0,51	0,59	0,68	0,76	0,85	0,93	1,02
900	0,09	0,18	0,27	0,36	0,45	0,54	0,63	0,72	0,81	0,9	0,99	1,08
950	0,09	0,19	0,28	0,38	0,47	0,57	0,66	0,76	0,85	0,95	1,04	1,14
1000	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,80	0,9	1	1,1	1,2

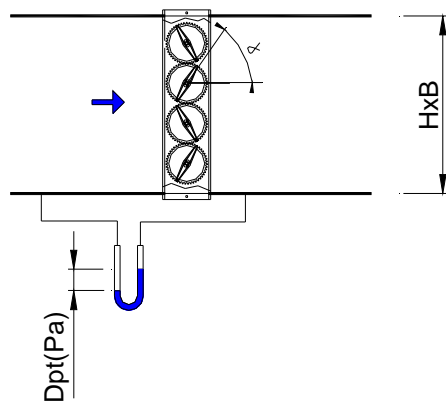


# SQR-EH SERIES

FACE VELOCITY, PRESSURE LOSS AND SOUND POWER LEVEL

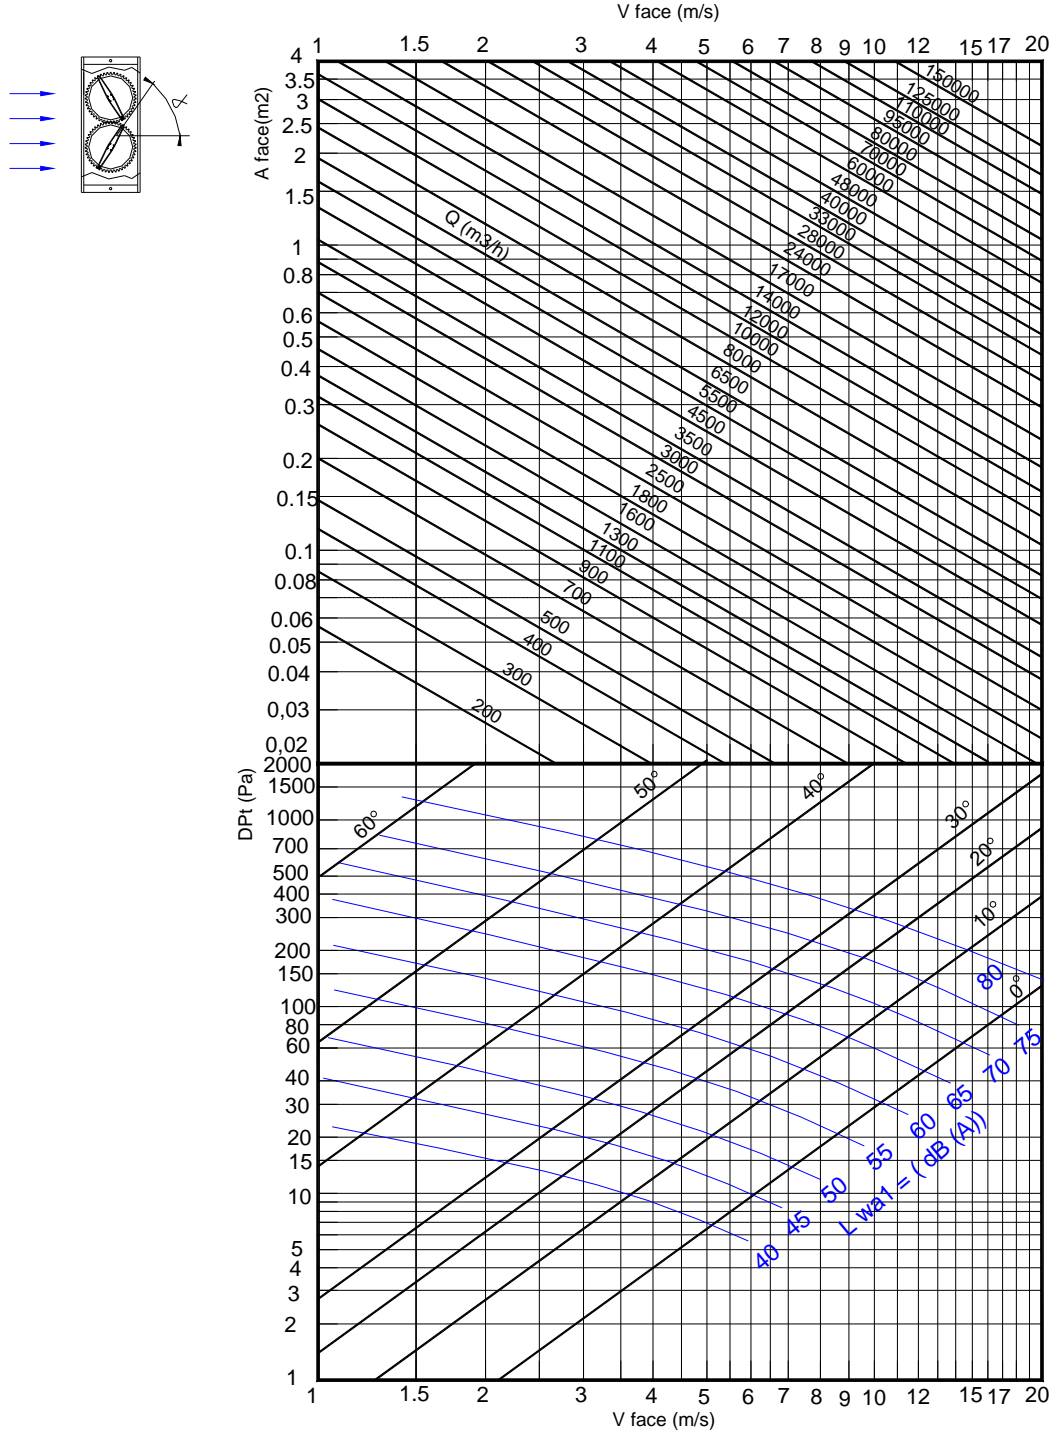


## SQR SERIES

### TORQUE

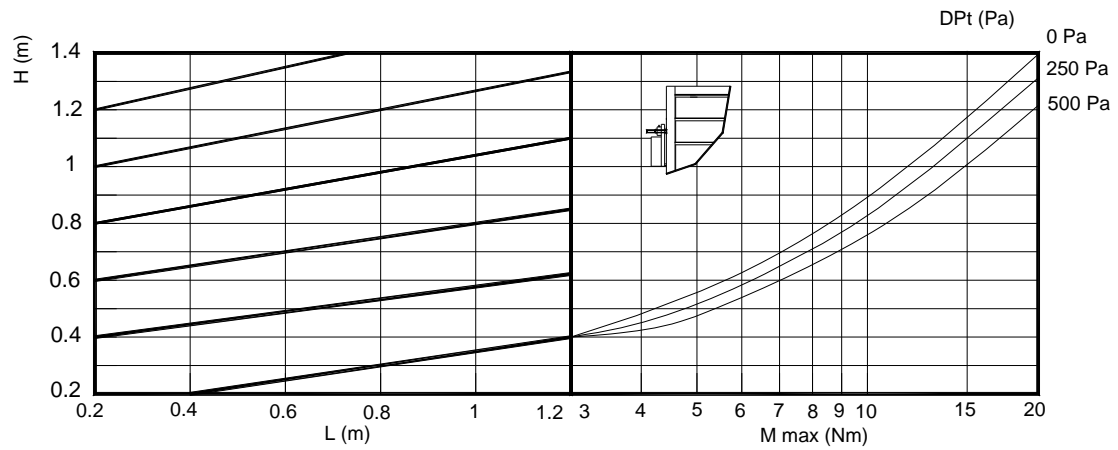

### SQR-EH


#### LEAKAGE LOSS

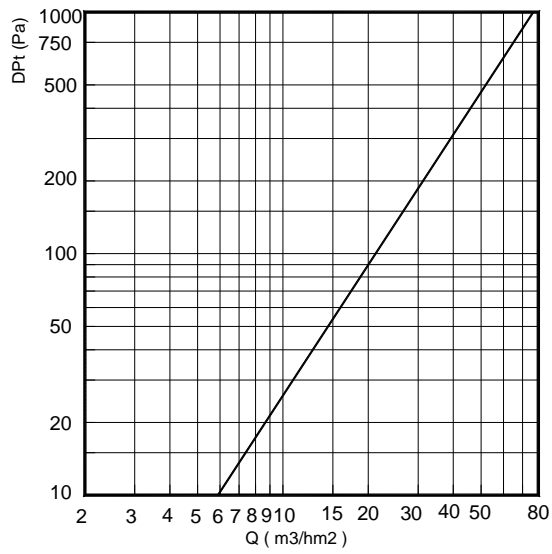



# SQR-BH SERIES


FACE VELOCITY, PRESSURE LOSS AND SOUND POWER LEVEL

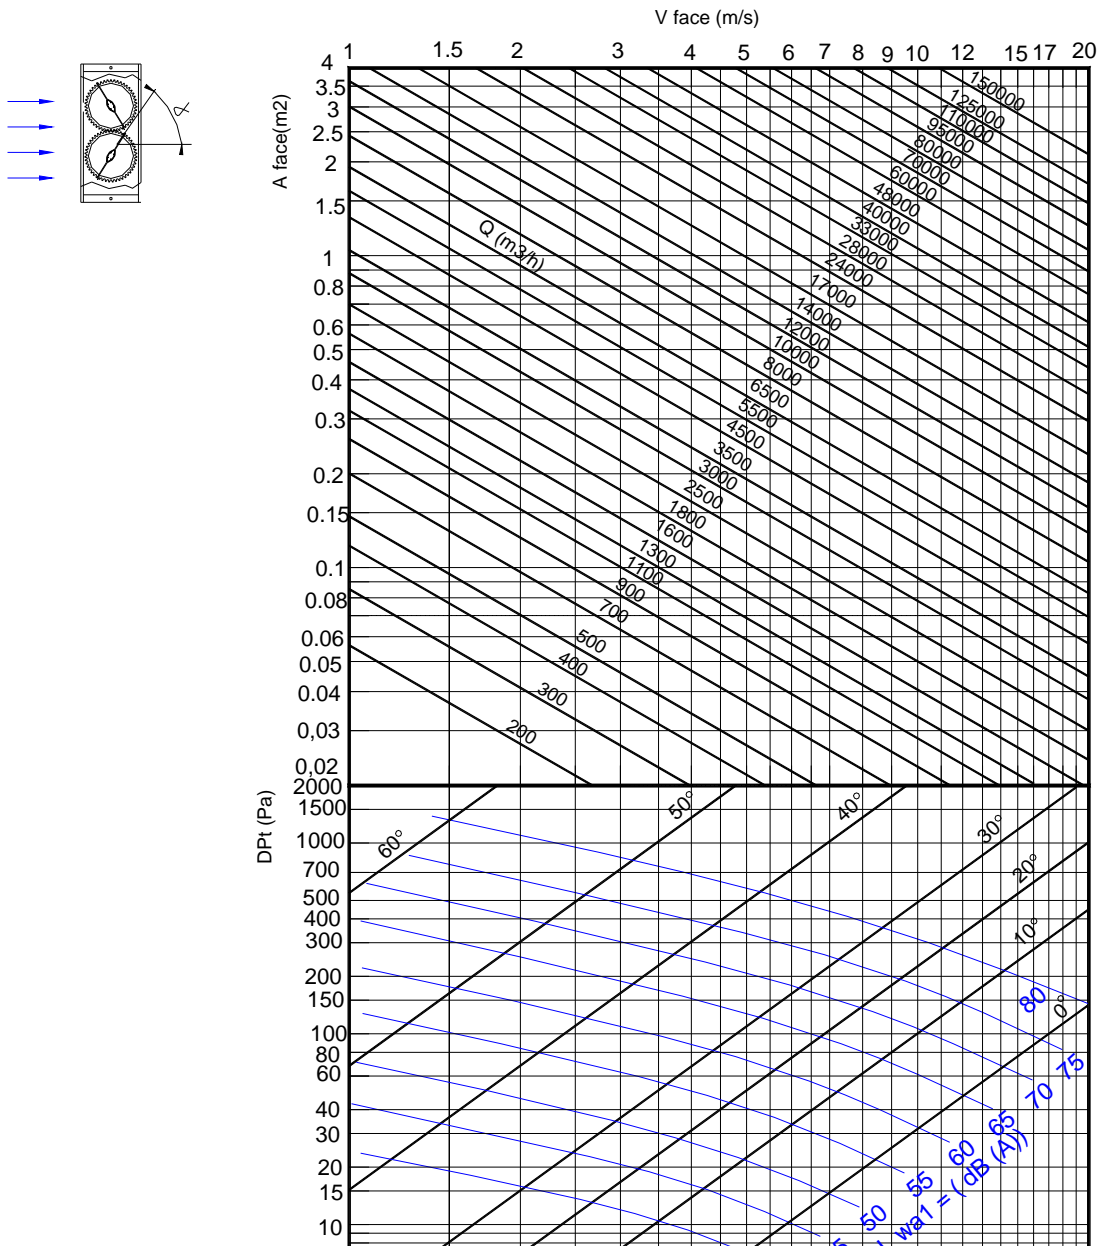

**ON/OFF – 3P CONTROL.**


**GDB / GLB 14..1E**  
Open-close, Single wire control

AC 24 V  
DC 24 V ... 48 V ...




**GDB / GLB 14..1E**  
Open-close, Two wire control

AC 24 V  
DC 24 V ... 48 V ...




**GDB / GLB 14..1E**  
**GEB 13..1E**  
Three-position control

AC 24 V  
DC 24 V ... 48 V ...

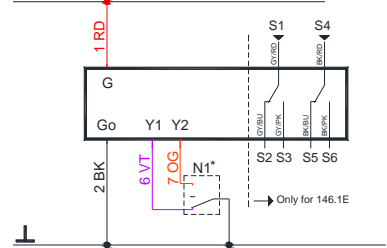


**GDB / GLB 34..1E**  
Open-close, Single wire control

AC 100 ... 240 V




**GDB / GLB 34..1E**  
Open-close, Two wire control

AC 100 ... 240 V



**GDB / GLB 34..1E**  
**GEB 33..1E**  
Three-position control


AC 100 ... 240 V

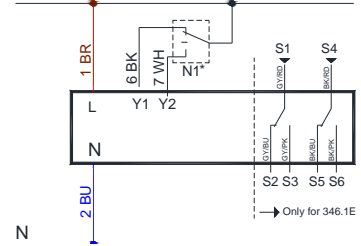

**SPRING RETURN - ON/OFF – Two-position control**


**GMA 121.1E**  
Two-position control

AC 24 V  
DC 24 V ... 48 V ...



**GMA 321.1E**  
Two-position control

AC 100 ... 240 V




N1\*. Accessory control. See wiring diagrams accessories.

Wiring	Code	N°	Color	Description	
Actuators AC 24 V~ DC 24..48V	G	1	RD Red	System potential 24 AC/DC	
	G0	2	BK Black	System Neutral	
	Y1	6	VT Purple	Positioning AC/DC 0V. cw	
	Y2	7	OG Orange	Positioning AC/DC 0V. ccw	
	Y	8	GY Grey	Signal in (0-10V)	
	U	9	PK Pink	Signal out (0-10 V)	
	Actuators AC 230 V~	L	3	BR Brown	Line 100 .. 240 AC
		N	4	BU Blue	Neutral conductor
		Y1	6	BK Black	Positioning AC 230V. cw
Y2		7	WH White	Positioning AC 230V. ccw	
G+		1	RD Red	Potential aux. 24 AC/DC	
G-		2	BK Black	Neutral aux. 24 AC/DC	
Y		8	GY Grey	Signal in (0-10V)	
U	9	PK Pink	Signal out (0-10 V)		
Auxiliary contacts	Q11	S1	GY/RD	Input switch A	
	Q12	S2	GY/BU	Contact NC switch A	
	Q14	S3	GY/PK	Contact NO switch A	
	Q21	S4	BK/RD	Input switch B	
	Q22	S5	BK/BU	Contact NC switch B	
	Q24	S6	BK/PK	Contact NO switch B	

**MODULATING control 0-10 V**


**GDB / GLB / GEB 16..1E**  
Modulating control

AC 24 V  
DC 24 V ... 48 V ...



**GDB / GLB 36..1E**  
Modulating control

AC 100 ... 240 V




This information is provided by way of indication. Consult the manufacturer catalogue for all updated documentation.

<https://www.buildingtechnologies.siemens.com/bt/global/en/products/HVAC-Products/Damper-actuators/Actuators-for-HVAC-applications/Pages/Actuators-for-HVAC-applications-default.aspx>


## BELIMO Wiring diagrams

### ON/OFF – 3P CONTROL.


LM-24A..(S)  
NM-24A..(S)  
AC/DC 24 V, Open-close

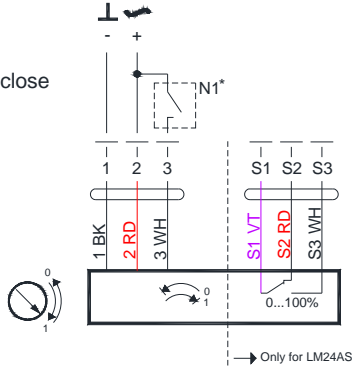


LM-24A..(S)  
NM-24A..(S)  
AC/DC 24 V, 3-point

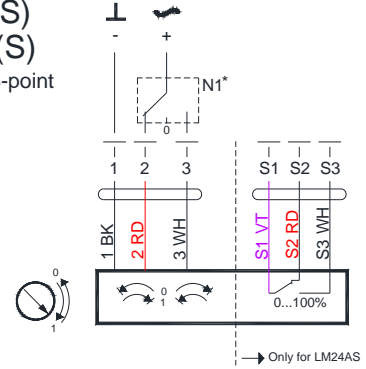

LM-230A..(S)  
NM-230A..(S)  
AC 230 V, Open-close

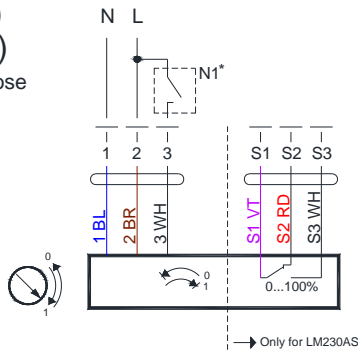


LM-230A..(S)  
NM-230A..(S)  
AC 230V, 3-point

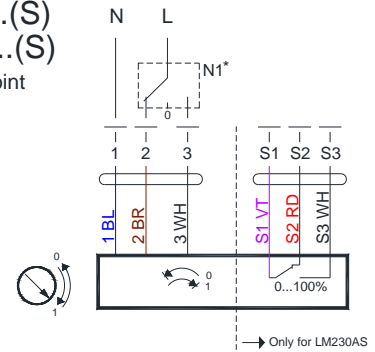


### SPRING RETURN - ON/OFF – Two-position control

LM-230A..(S)  
NM-230A..(S)  
AC 230 V, Open-close



LM-230A..(S)  
NM-230A..(S)  
AC 230V, 3-point




N1\*. Accessory control. See wiring diagrams accessories.


Wiring	Code	N°	Color	Description
Actuators Open-close AC 24 V~ DC 24..48V	-	1	BK Black	System Neutral
	+	2	RD Red	System potential 24 AC/DC
		3	WH White	Positioning AC/DC 0V.
Actuators modulating AC-DC 24 V AC 230V	-	1	BK Black	System Neutral
	+	2	RD Red	System potential 24 AC/DC
		3	WH White	Signal in (0) 2-10V
		5	OG Orange	Signal out 2-10V
Actuators AC 230 V~	L	1	BU Blue	Line 100 .. 240 AC
	N	2	BR Brown	Neutral conductor
	G+	1	BK Black	Neutral aux. 24 AC/DC
	G-	2	RD Red	SG..24
	Y	3	WH White	Signal in (0-10V)
U	5	OG Orange	Signal out (0-10 V)	
Auxiliary contacts	S1	S1	VT Violet	Input switch A
	S2	S2	RD Red	Contact NC switch A
	S3	S3	WH White	Contact NO switch A

### MODULATING control 0-10 V

LM24A-SR  
NM24A-SR  
AC/DC 24 V, Modulating



LM230A-SR  
NM230A-SR  
AC 230 V, Modulating





This information is provided by way of indication.  
Consult the manufacturer catalogue for all updated  
documentation.

<http://www.belimo.ch/CH/EN/PDF/index.cfm>



## TF Wiring diagrams

### TF + SIEMENS actuators

#### AC/DC 24 V - ON/ OFF control

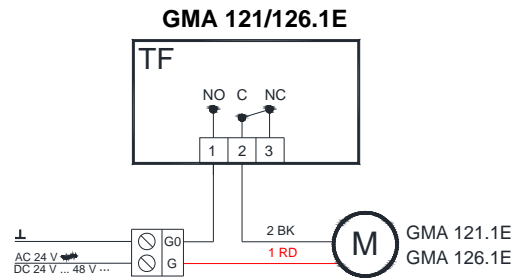
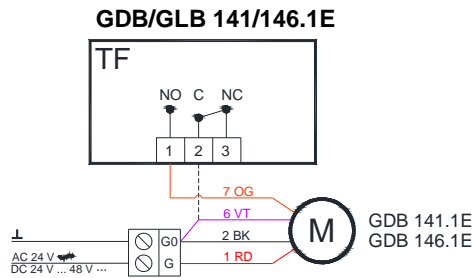


#### AC 230 V - ON/ OFF control

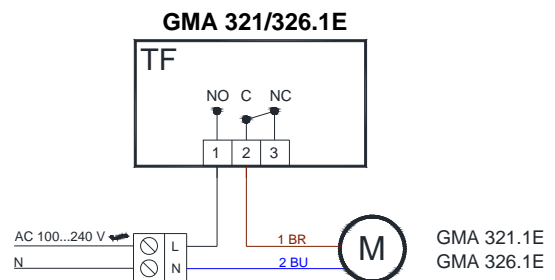
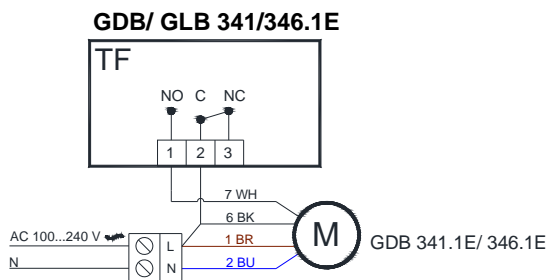


### TF + BELIMO actuators

#### AC/DC 24 V - ON/ OFF control

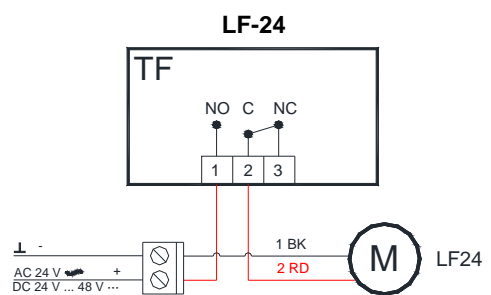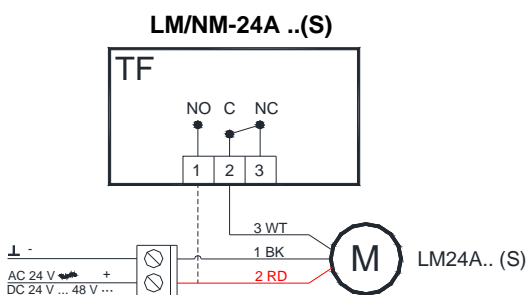

#### AC 230 V - ON/ OFF control

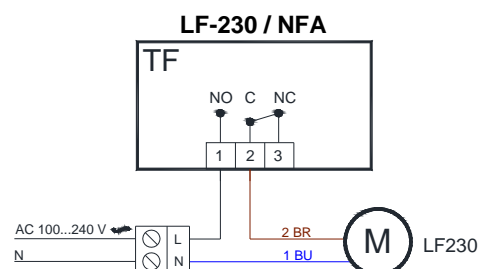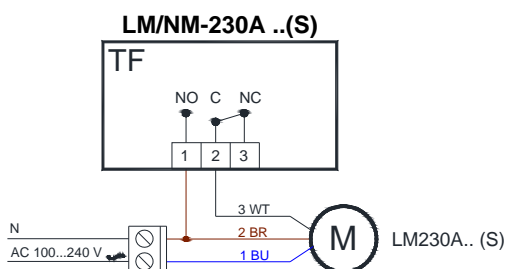


## RDG400 Wiring diagrams


### RDG 400 + SIEMENS actuators

#### Modulating control + manual changeover

##### GDB/GLB 161.1E

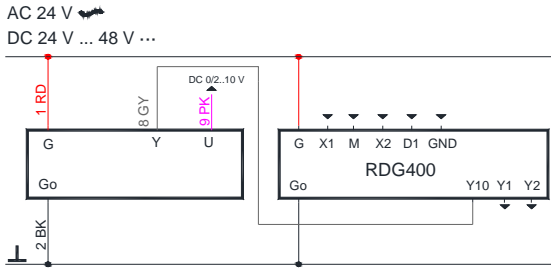


##### GDB/ GLB 361.1E

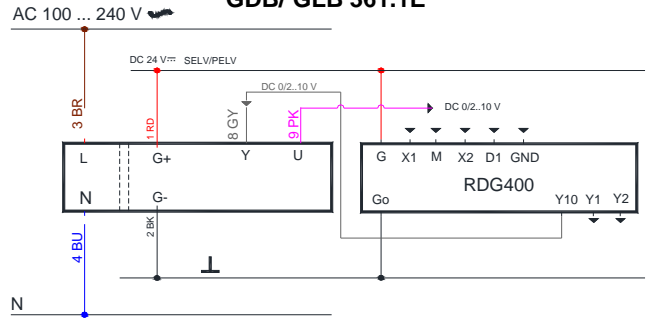


### RDG 400 + BELIMO actuators

#### Modulating control + manual changeover

##### LM/ NM-24A -SR

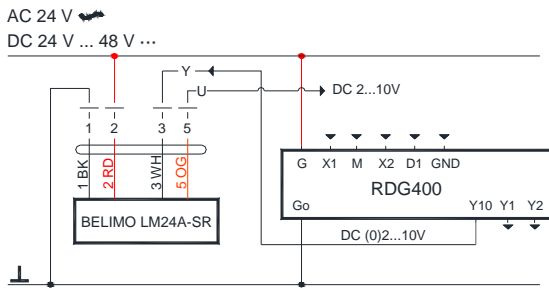


##### LM/NM230A-SR

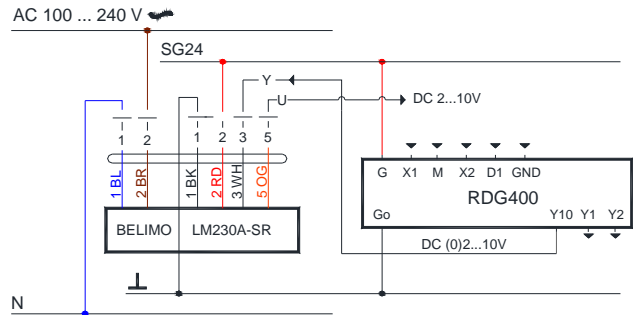

## CO2-WR Wiring diagrams


### CO2-WR+ SIEMENS GDB/GLB 141.1E

#### On/OFF control

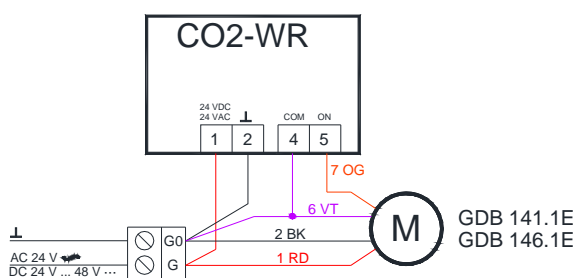

### CO2-WR+ BELIMO LM/NM24A.. (S)

#### On/OFF control

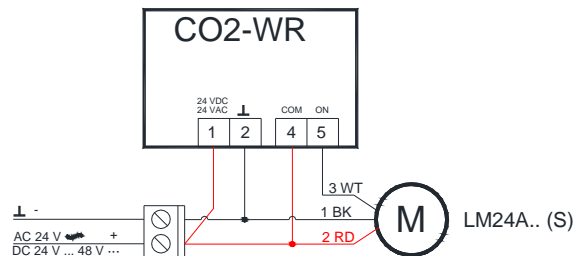


	J4	J5	Relay
800 ppm	disconnected	disconnected	CO2 > 900 ppm. Relay ON; CO2 < 700 ppm Relay OFF
1000 ppm	connected	disconnected	CO2 > 1100 ppm. Relay ON; CO2 < 900 ppm Relay OFF
1200 ppm (default)	disconnected	connected	CO2 > 1200 ppm. Relay ON; CO2 < 1100 ppm Relay OFF
1400 ppm	connected	connected	CO2 > 1500 ppm. Relay ON; CO2 < 1300 ppm Relay OFF


## CO2-WP Wiring diagrams

### CO2-WP + SIEMENS actuators

#### AC/DC 24 V – Modulating control GDB/GLB 161.1E

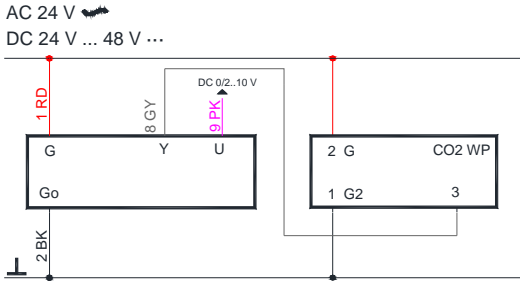


#### AC 230 V – Modulating control GDB/GLB 361.1E

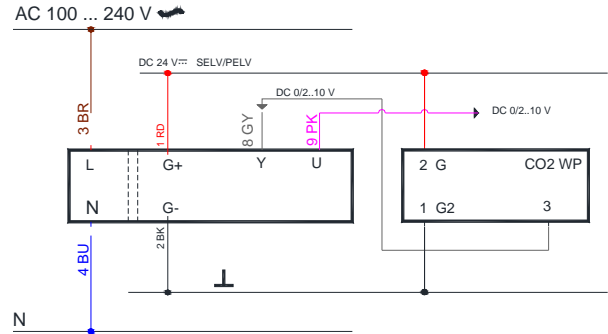


### CO2-WP + BELIMO actuators

#### AC/DC 24 V – Modulating control LM/NM 24A-SR

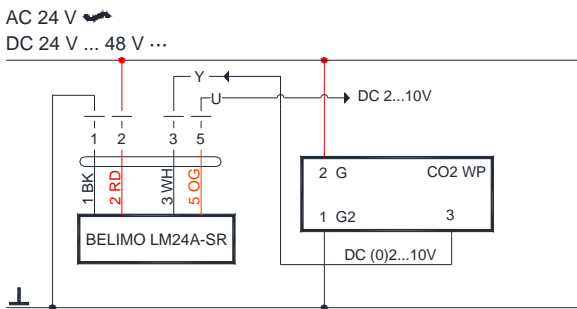


#### AC 230 V – Modulating control

#### LM/ NM 230A - SR

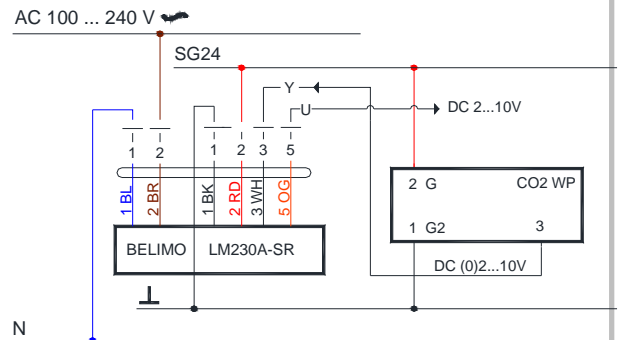

### CO2-WP Setting

J3 J1 J2 S1 S2



J4 J5

	J1	J2
0-10 VDC(default)	disconnected	disconnected
2-10 VDC	connected	disconnected


	J3
PID out put (default)	disconnected
Linear output	connected

	J4	J5
350 ppm	disconnected	disconnected
500 ppm	connected	disconnected
800 ppm (default)	disconnected	connected
1200 ppm	connected	connected


## CO2-D Wiring diagrams

### CO2-WD + SIEMENS actuators

#### AC/DC 24 V – Modulating control GDB/GLB 161.1E

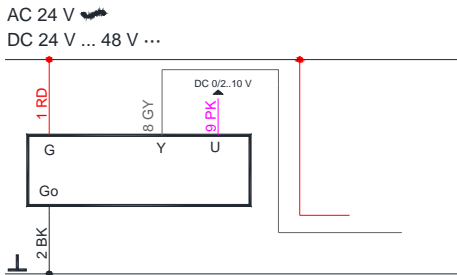


#### AC 230 V – Modulating control GDB/GLB 361.1E

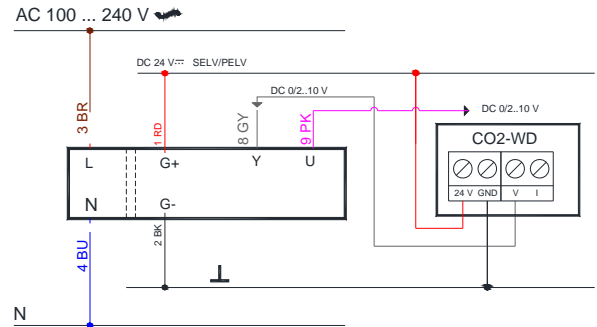


### CO2-WD + BELIMO actuators

#### AC/DC 24 V – Modulating control LM/NM24A-SR

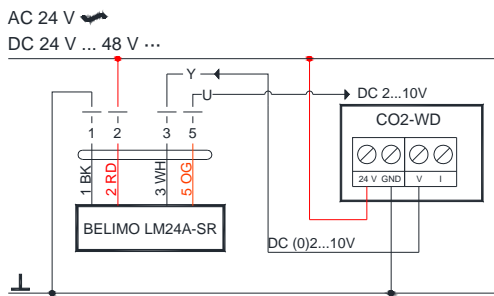


#### AC 230 V – Modulating control LM/NM230A - SR

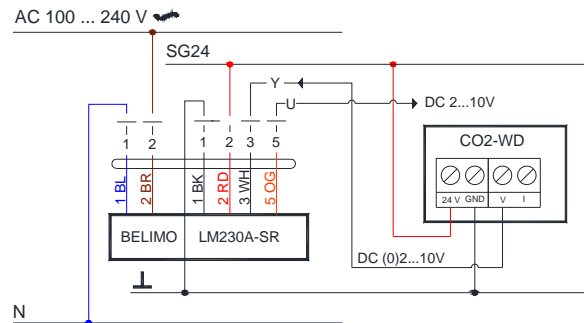

## OS-360 Wiring diagrams

### OS360+ SIEMENS GDB/GLB 141.1E

#### On/OFF control

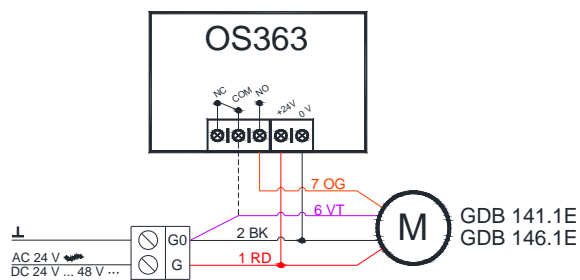


#### DELAY SETTING



### OS360+BELIMO LM/NM 24A.. (S)

#### On/OFF control

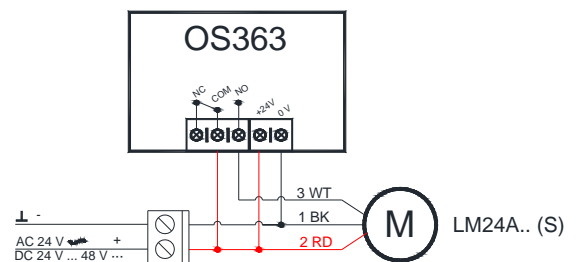

	A	B	C	D	E	F
ON	0 sec	10 sec	30 sec	1 min	5 min	10 min
OFF	10 sec	1 min	5 min	10 min	20 min	30 min